

FIG. 1

PEN CONFIGURATION USED IN FIRST EMBODIMENT

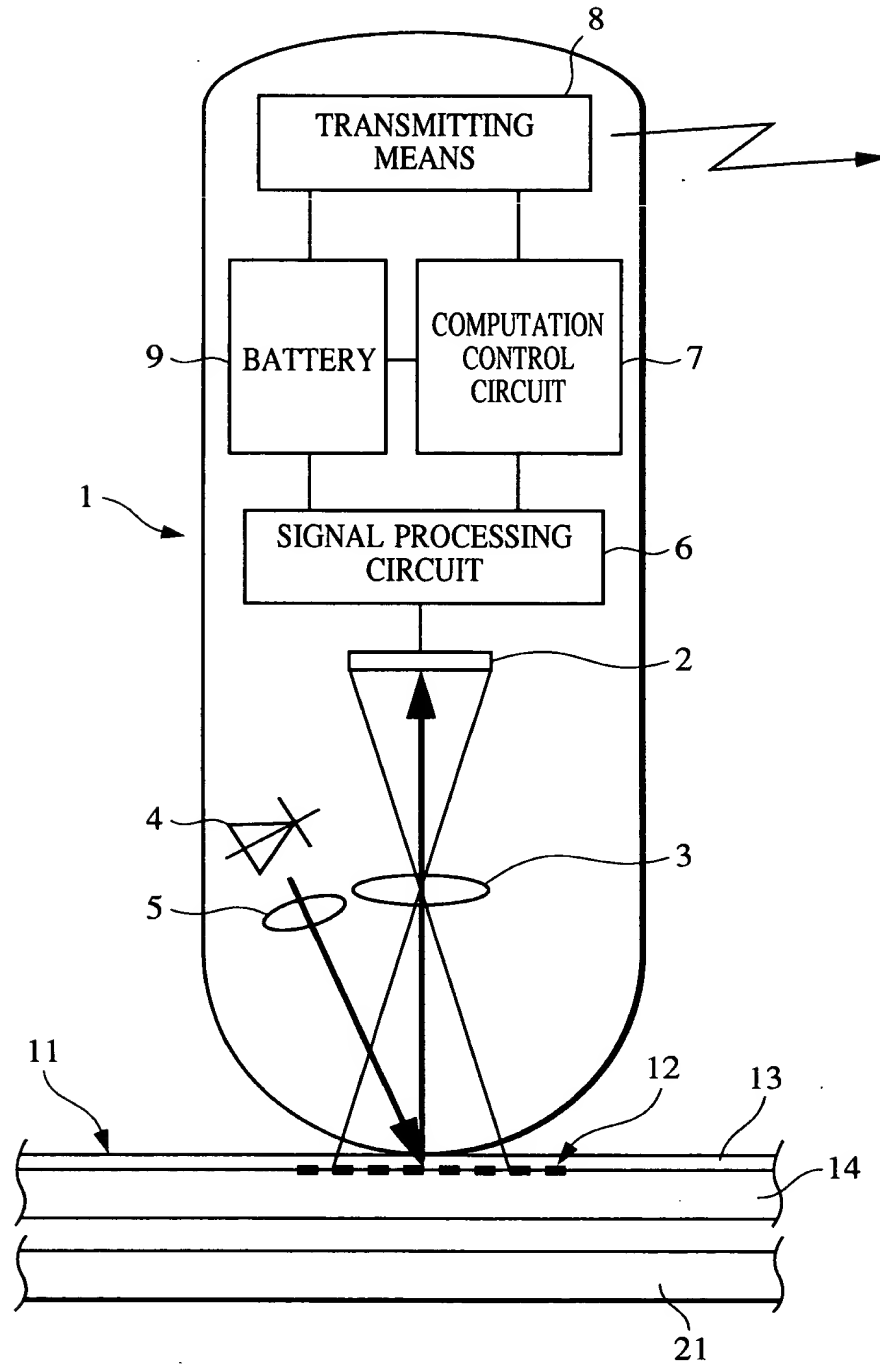


FIG. 2

BLOCK DIAGRAM OF ENTIRE SYSTEM IN FIRST EMBODIMENT

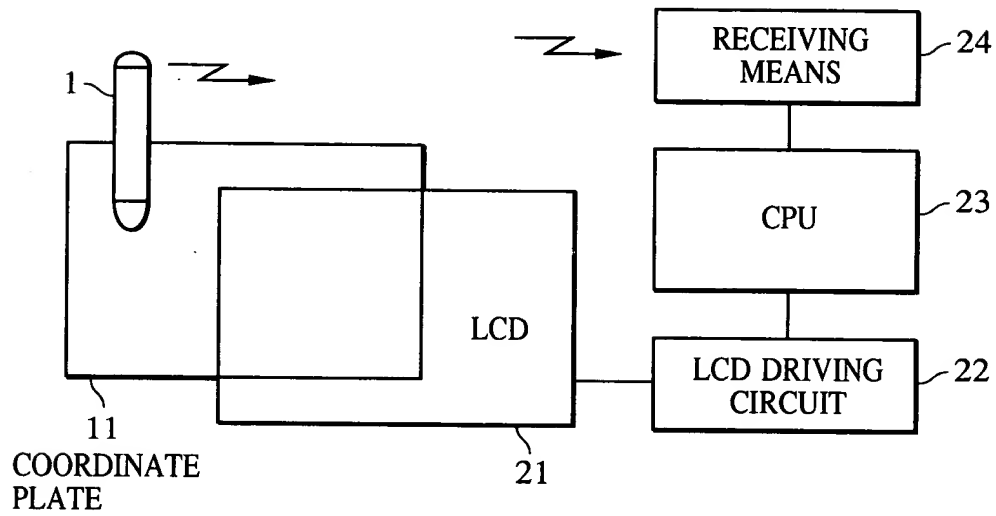


FIG. 3

DOT ARRAY OF COORDINATE PLATE USED IN FIRST EMBODIMENT

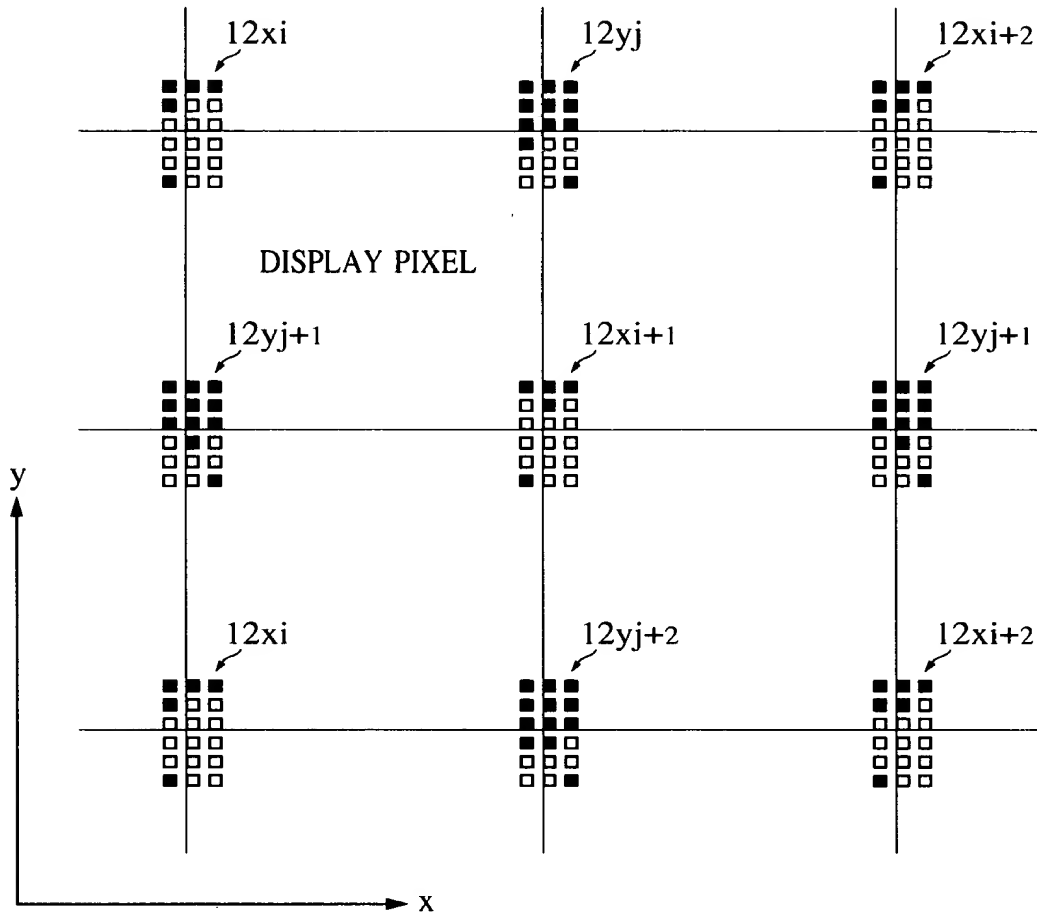


FIG. 4

FLOW CHART OF PROCESSING PROCEDURE OF FIRST EMBODIMENT


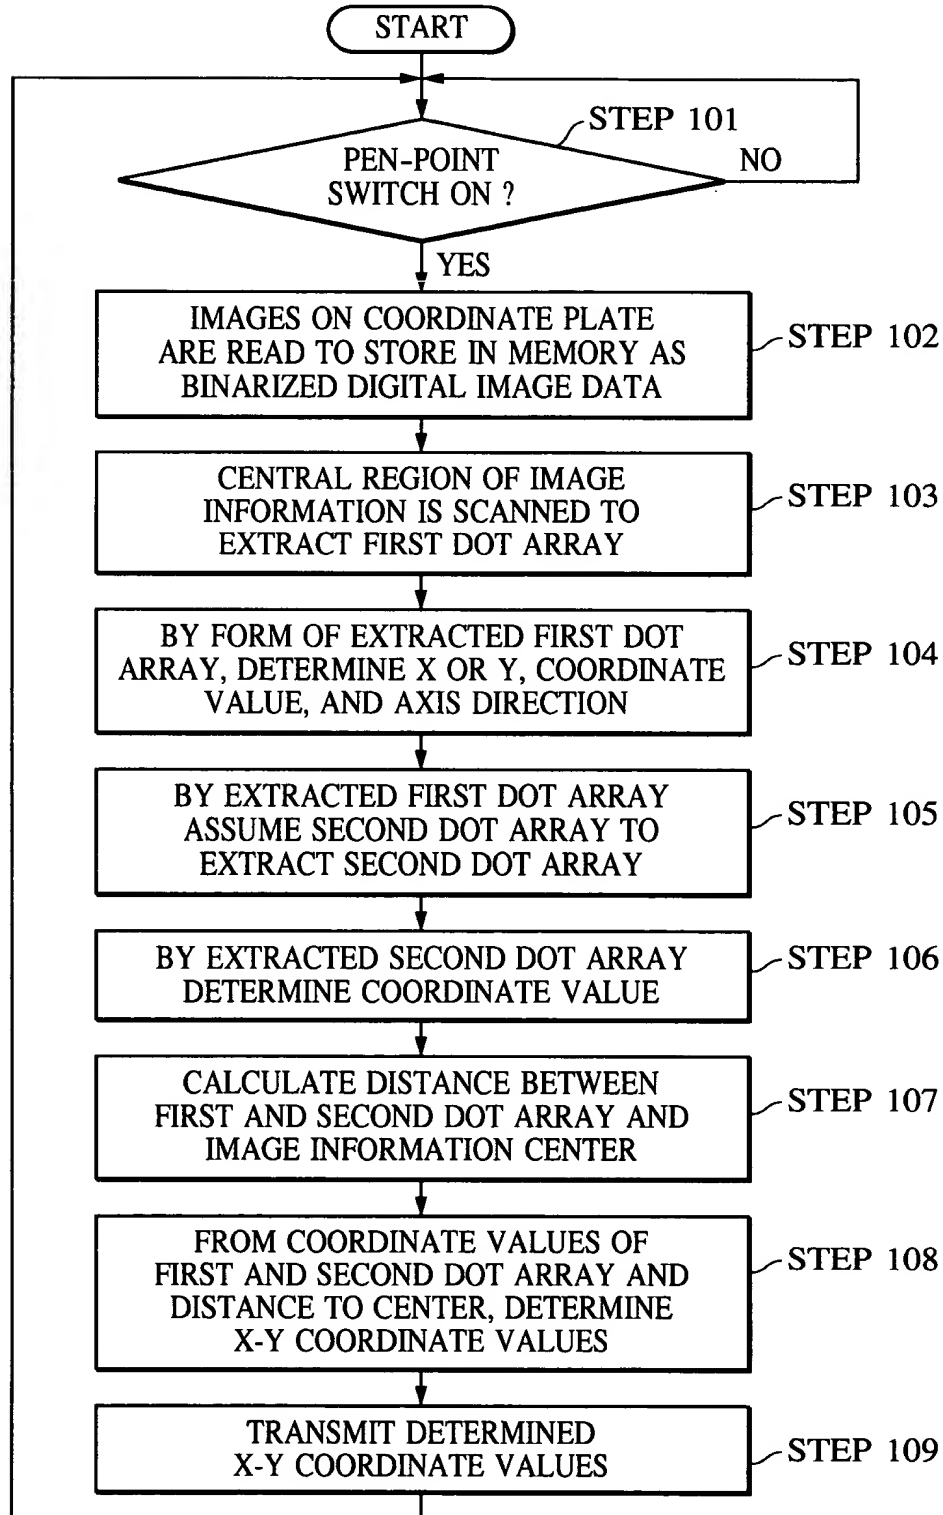


FIG. 5

IMAGE INFORMATION TO BE READ BY AREA SENSOR IN FIRST EMBODIMENT

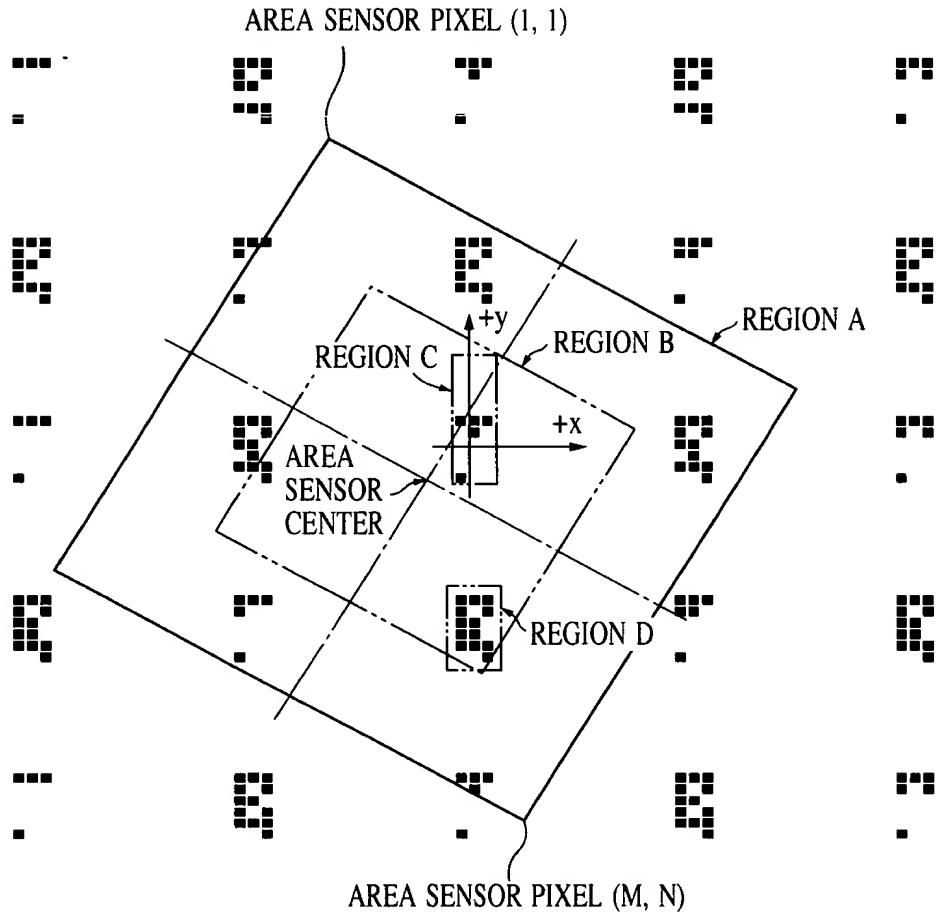

09973838-101101

FIG. 6

IMAGE INFORMATION TO BE READ BY AREA SENSOR IN FIRST EMBODIMENT

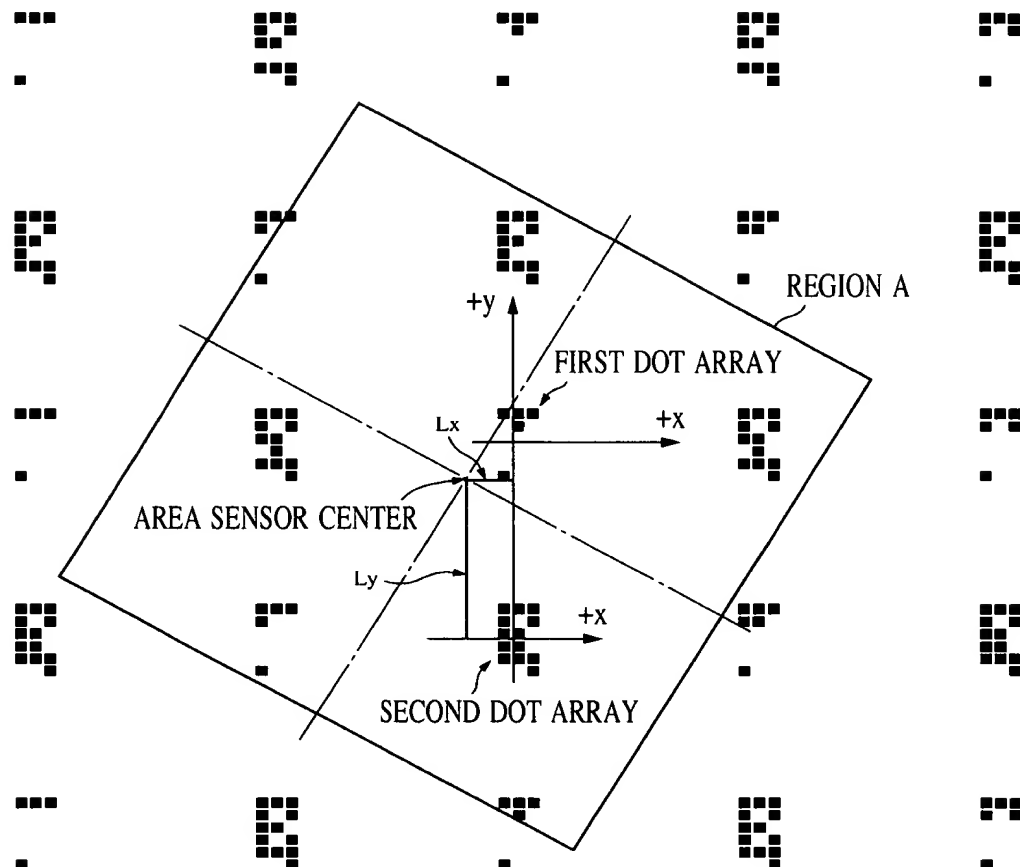


FIG. 7

SCHEMATIC SECTIONAL VIEW OF
COORDINATE PLATE USED IN SECOND EMBODIMENT

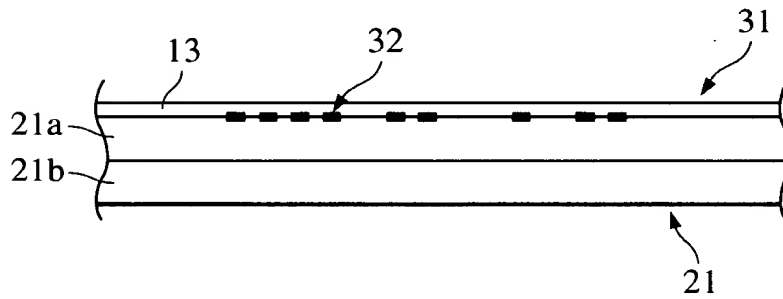


FIG. 8

DOT ARRAY OF COORDINATE PLATE USED IN SECOND EMBODIMENT


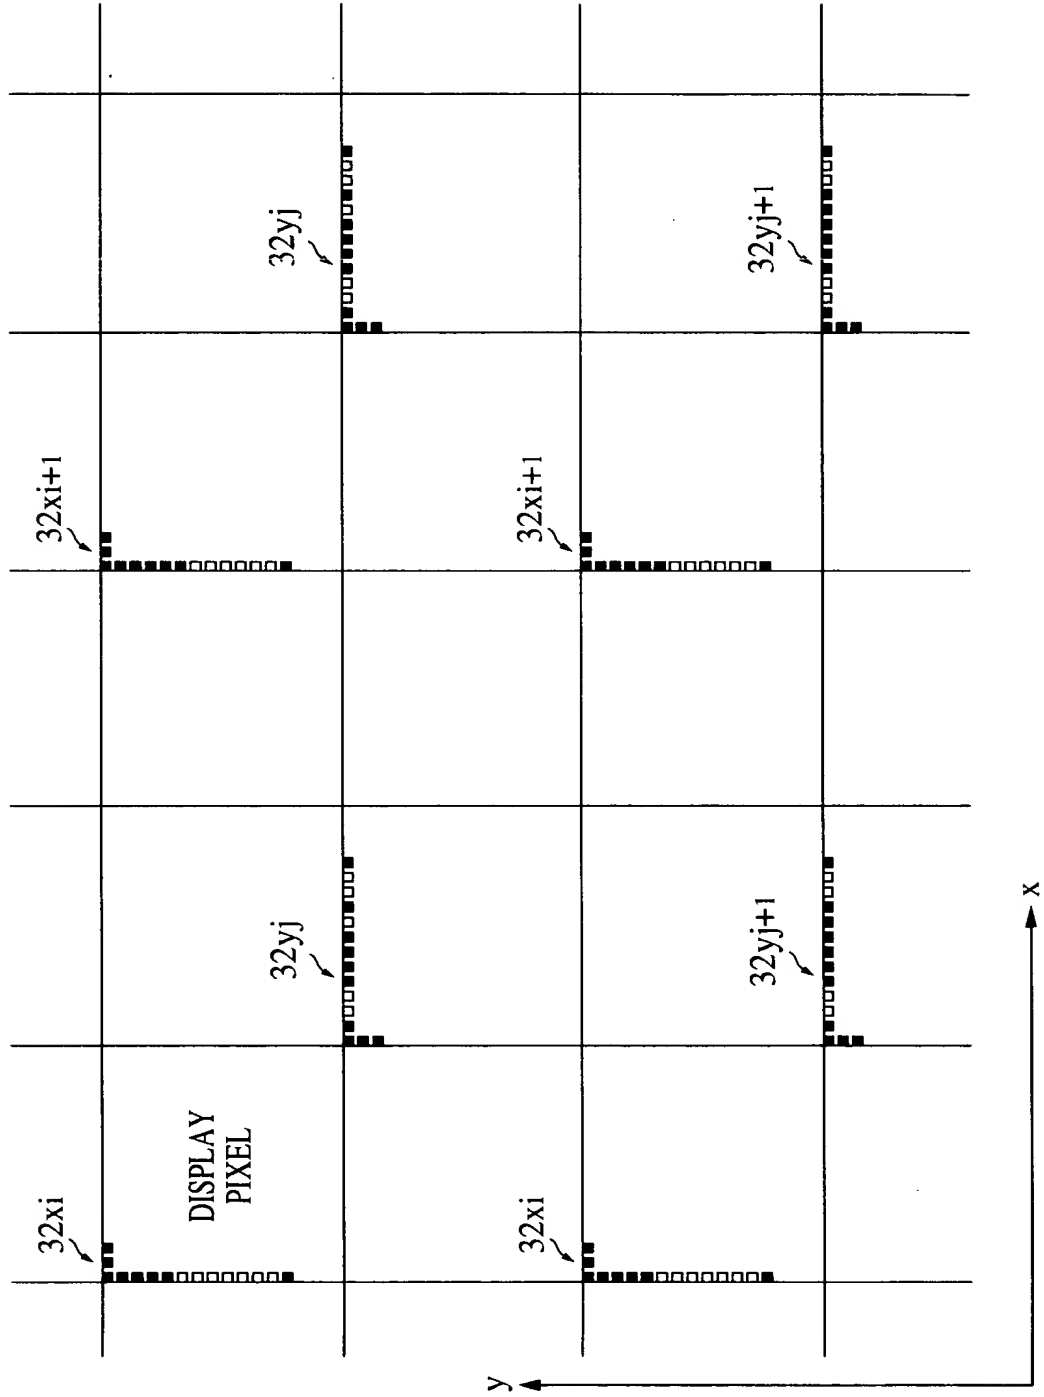


FIG. 9

SCHEMATIC SECTIONAL VIEW OF COORDINATE PLATE
IN MODIFIED EMBODIMENT

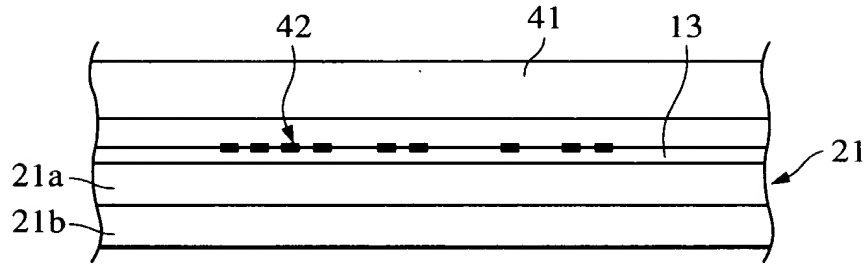

09973838-101101